



Switchable Duplex LC Uniboot Fiber Optic Patch Cord


Duplex Uniboot connector patch cord is designed by KOC. This highly flexible duplex cable reduces cabling congestion and improves patch cord management and installation, it improves cabling space.

解决方案跳线提供自行设计的双芯Uniboot连接器，这种高度灵活的2芯单根光缆减少了光缆拥塞，提高跳线管理和敷设的便利性，并改善了配线空间。

Features (特点)

- Fiber polarity A -> A or A -> B can be switched by installer
- Thin round cable
- Duplex connectors with single boot which is highly integrated and easy for installation
- Standard compatible, simplex / duplex LC connectors. Other options: SC / FC
- High performance, 100% tested
- Fiber type: OFNR, OFNP
- Customized patch cord length
- Two notches on the connectors for easy for installation and uninstallation
- Mini and flexible boot is available. Boot can be turned to any angle
- Quick deployment reduces installation time
- Fast upgrading supports parallel transmission system
- Outer jacket material, PVC, LSZH and other materials selection

- 极性A -> A or A -> B 可现场装换
- 线缆，采用圆形细光缆
- 双工单尾套，高度集成，方便施工
- 标准兼容，双工LC连接器
- 传输性能，100%工厂测试
- 连接器两端有两个缺口，容易拆装
- Mini 尾套和任意角度可弯曲尾套可选
- 快速部署，减少现场施工时间
- 快速升级，支持并行传输系统应用
- 外护套材质，有PVC、LSZH 等多种材料选择
- 光缆材料，满足OFNR、OFNP阻燃等级
- 跳线长度可定制

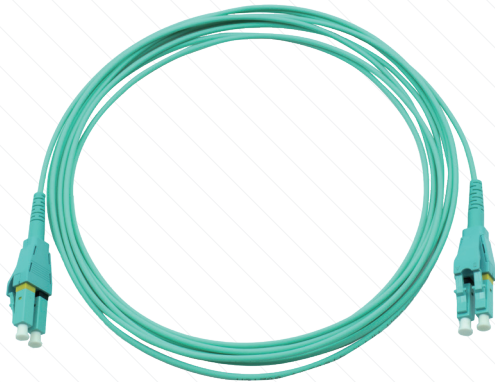

Specifications

Item	Single mode	Multimode
Insertion Loss (插入损耗)	≤0.30 dB	≤0.30 dB
Return Loss (回波损耗)	≥50 dB (PC) , ≥60 dB (APC)	/
Durability (耐久性)	<0.20 dB typical change, 1000 matings	/
Operating Temperature (工作温度)	-40 to +85°C	-40 to +85°C